



M.W.A. WELDING (THAILAND) CO., LTD.

68/88 หมู่ 6 ตำบลเสาธงหิน อำเภอบางใหญ่ จังหวัดนนทบุรี
11140 โทร: 02-9030911-2 โทรสาร: 02-9030916
Email: mwathailand@hotmail.com



SYNTHETIC FIBER PACKING





M.W.A. WELDING (THAILAND) CO., LTD.

68/88 หมู่ 6 ตำบลเสาธงหิน อำเภอบางใหญ่ จังหวัดนนทบุรี
11140 โทร: 02-9030911-2 โทรสาร: 02-9030916
Email: mwathailand@hotmail.com




Acrylic PTFE Packing



Description:

SUNPASS STYLE 2200 was made of polypropylene fiber by reinforcing, braiding and impregnating with PTFE. It has high strength, abrasion resistance, and erosion resistance, and is an ideal substitute for asbestos packing. It is suitable for pumps, valves and kettles with higher linear speed and higher pressure.

Application Data:

			
Pressure: bar	20	100	150
Speed: m/s	20	1.5	2
PH Range	2-14		
Temp. °C	+ 260		
Density(g/cm ³)	1.0-1.4		



M.W.A. WELDING (THAILAND) CO., LTD.

68/88 หมู่ 6 ตำบลเสาธงหิน อำเภอบางใหญ่ จังหวัดนนทบุรี
11140 โทร: 02-9030911-2 โทรสาร: 02-9030916
Email: mwathailand@hotmail.com

Acrylic PTFE Packing With Lubricant



Description:

Acrylic/ Pan Fiber Packing With PTFE Braided from high strength PAN synthetic fiber pre-impregnated with PTFE, and reimpregnated during square braiding. It has excellent properties of sealing, lubricating and resistance to chemicals.

Especially for the condition of middle-temperature, high-pressure, high-speed, and where contamination is not permitted.

STOCK DIMENSION:

mm sq.	3.2	4	5	6	8	10	11	12	14	16	18	20	22	25
m/kg abt.	50	34	25	15	10	7.1	5.3	4.1	3.6	2.8	2.3	1.8	1.4	1.1
Inch Sq.	1/8"	5/32"	3/16"	1/4"	5/16"	3/8"	7/16"	1/2"	9/16"	5/8"	11/16"	3/4"	7/8"	1"

APPLICATION DATA:


T 度	+260度		
P bar	100	100	20
V m/s	2	1.5	20
PH	1-13		



M.W.A. WELDING (THAILAND) CO., LTD.

68/88 หมู่ 6 ตำบลเสาธงหิน อำเภอบางใหญ่ จังหวัดนนทบุรี
11140 โทร: 02-9030911-2 โทรสาร: 02-9030916
Email: mwathailand@hotmail.com

Acrylic Fiber Packing with Graphite

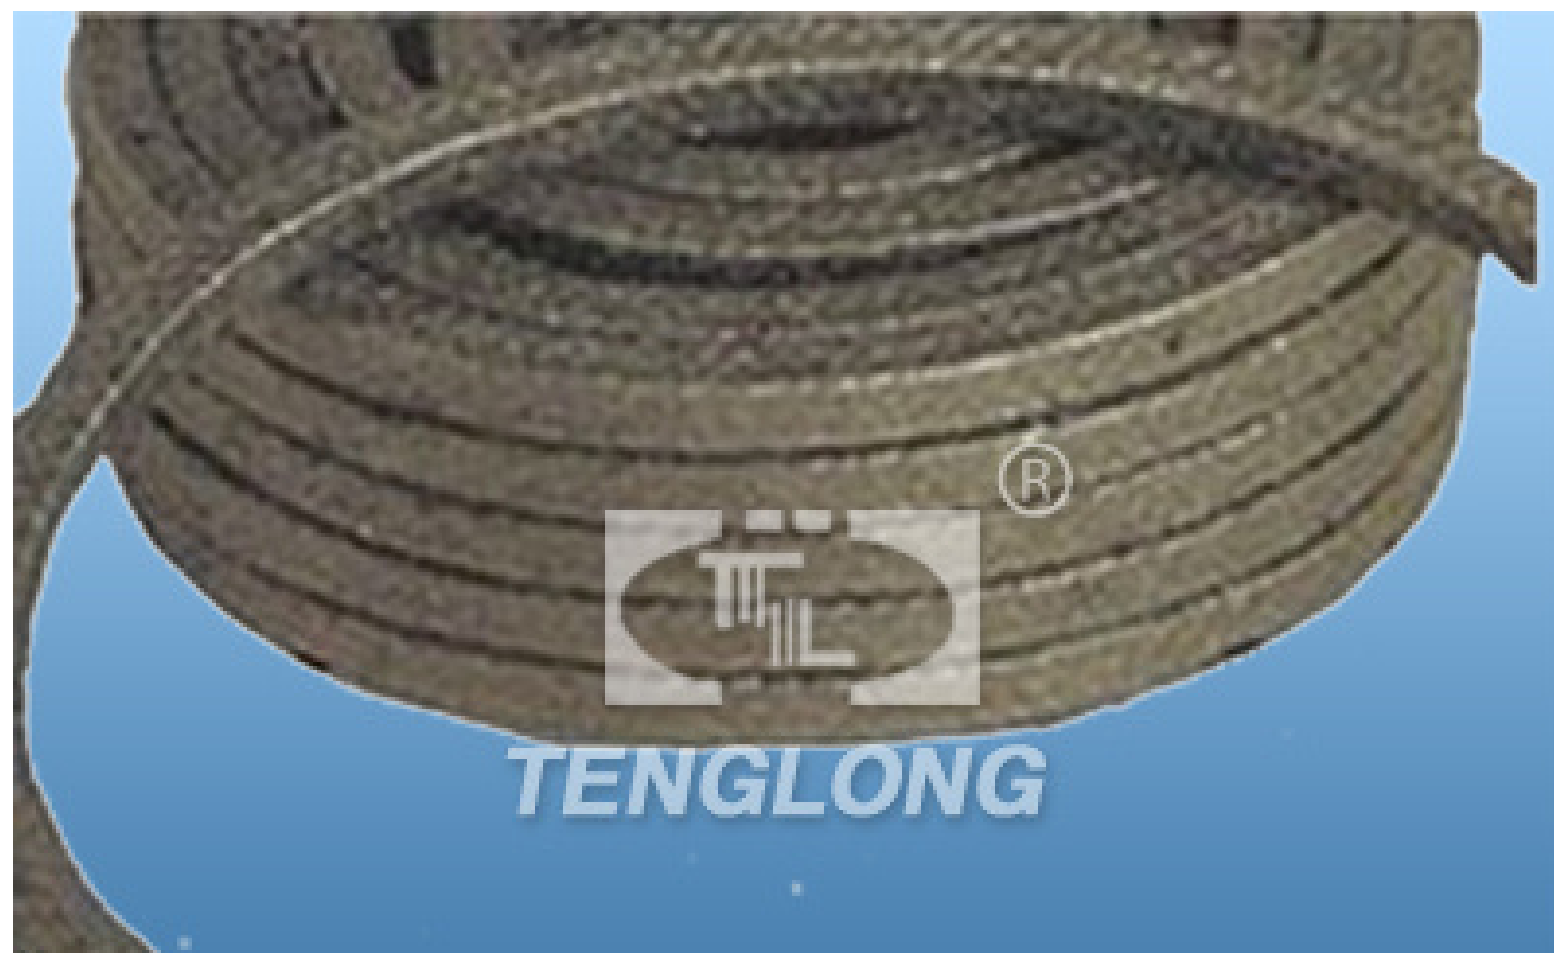

Description:

Arcylic/ Pan Fiber Packing Wlth Graphite Braided from high strength PAN synthetic fiber pre-impregnated with Graphite, this packing is Special synthetic yarn impregnated with special lubricant and graphite flakes.




Applications:

It can be Widely used in application of solvents, alkalies, mild acids, oils, and water. this packing is recommended for rotary shaft, reciprocating applications, and valves.

STOCK DIMENSION:

mm sq.	3.2	4	5	6	8	10	11	12	14	16	18	20	22	25
m/kg abt	50	34	25	15	10	7.1	5.3	4.1	3.6	2.8	2.3	1.8	1.4	1.1
Inch Sq.	1/8"	5/32"	3/16"	1/4"	5/16"	3/8"	7/16"	1/2"	9/16"	5/8"	11/16"	3/4"	7/8"	1"

APPLICATION DATA:

			
T 磅	+260磅		
P bar	100	100	10
V m/s	2	1.5	16
PH	4-10		



M.W.A. WELDING (THAILAND) CO., LTD.

68/88 หมู่ 6 ตำบลเสาธงหิน อำเภอบางใหญ่ จังหวัดนนทบุรี
11140 โทร: 02-9030911-2 โทรสาร: 02-9030916
Email: mwathailand@hotmail.com

Acrylic Packing With Silicon Core



Description:

Acrylic/ Pan Fiber Packing With Four Silicone Core Braided from high strength PAN synthetic fiber pre-impregnated with PTFE and Silicone Core, it is Composite braid, synthetic composite yarn braided around four equally silicone rubber cords, and impregnated with PTFE emulsion and special producing with lubricant. forming a packing that offers excellent resilience and wear resistance.

Applications: It is Excellent for worn glands and for large equipment with eccentricity and run-out problems.

STOCK DIMENSION:

mm sq.	3.2	4	5	6	8	10	11	12	14	16	18	20	22	25
m/kg abt	50	34	25	15	10	7.1	5.3	4.1	3.6	2.8	2.3	1.8	1.4	1.1
Inch Sq.	1/8"	5/32"	3/16"	1/4"	5/16"	3/8"	7/16"	1/2"	9/16"	5/8"	11/16"	3/4"	7/8"	1"

APPLICATION DATA:

T 磨	+260磨		
P bar	100	100	20
V m/s	2	1.5	20
PH	1-13		