



M.W.A. WELDING (THAILAND) CO., LTD.

68/88 หมู่ 6 ตำบลเสาธงหิน อำเภอบางใหญ่ จังหวัดนนทบุรี 11140

โทร: 02-9030911-2 โทรสาร: 02-9030916

Email: mwathailand@hotmail.com



ASBESTOS PACKING

ประเก็นใยหิน



SunPass®



M.W.A. WELDING (THAILAND) CO., LTD.

68/88 หมู่ 6 ตำบลเสาธงหิน อำเภอบางใหญ่ จังหวัดนนทบุรี 11140
โทร: 02-9030911-2 โทรสาร: 02-9030916
Email: mwathailand@hotmail.com

Asbestos Graphite Packing



Descriptions:

It is a braided packing made of asbestos yarns, thoroughly impregnated piece by piece with dry graphite, and externally coated with pure graphite, suitable for specific area in the presence of **high temperatures and high pressures**.

Application: Valves, tap equipment, oils, super heated steam, solvents, hydrocarbons, gas, ammonia, abrasive liquids. Resistant to alkaline solutions, inert fluids, steam, gases, hot water and salt solutions

Specification Data:


Max Temp. (°C)	250 to 450
Max Pressure (Bar)	80
Density (g/cm ³)	1.4-1.6
Speed (m/s)	10
PH	4-10
Size (mm)	4-50
Package	5kgs/roll, or 10kgs/roll, 20kgs/carton



M.W.A. WELDING (THAILAND) CO., LTD.

68/88 หมู่ 6 ตำบลเสาธงหิน อำเภอบางใหญ่ จังหวัดนนทบุรี 11140
โทร: 02-9030911-2 โทรสาร: 02-9030916
Email: mwathailand@hotmail.com

Asbestos Graphite Packing With Oil

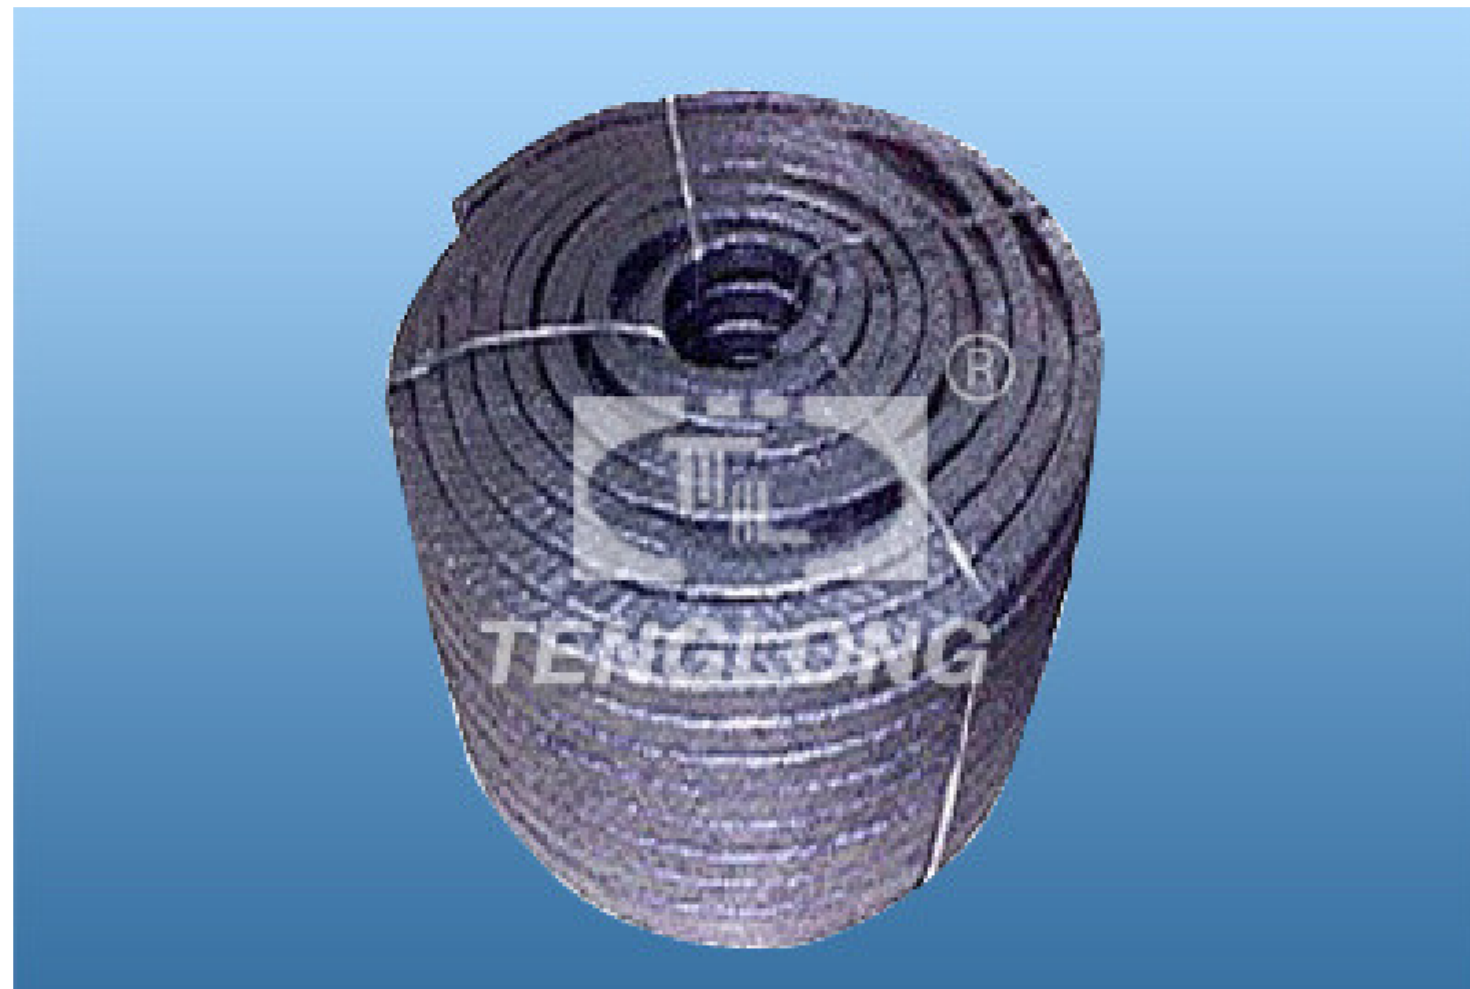

Description:

It is made of dusted asbestos yarns, treated with lubricant and graphite. Asbestos graphite packing with dust free asbestos core, or insert stainless steel wire or copper wire is also available. Metallic wire reinforced on request.

Application: Valves, tap equipment, oils, super heated steam, solvents, hydrocarbons, gas, ammonia, abrasive liquids. Resistant to alkaline solutions, inert fluids, steam, gases, hot water and salt solutions

Specification Data:

Max Temp. (°C)	250 to 350
Density (g/cm ³)	1.4-1.6
Size (mm)	4-50
Package	5kgs/roll, or 10kgs/roll, 20kgs/carton



M.W.A. WELDING (THAILAND) CO., LTD.

68/88 หมู่ 6 ตำบลเสาธงหิน อำเภอบางใหญ่ จังหวัดนนทบุรี 11140
โทร: 02-9030911-2 โทรสาร: 02-9030916
Email: mwathailand@hotmail.com

Wire Reinforced asbestos graphite Packing With Rubber



Description:

This packing seal is suitable for high temperature and high pressure, it is made of dusted asbestos yarns treated with rubber and graphite. Normal with metallic wire (copper wire, Inconel wire or stainless wire) reinforced.

Specification Data:


Max Temp. (°C)	250 to 550
Density (g/cm ³)	1.4-1.6
Size (mm)	4-50
Package	5kgs/roll, or 10kgs/roll, 20kgs/carton



M.W.A. WELDING (THAILAND) CO., LTD.

68/88 หมู่ 6 ตำบลเสาธงหิน อำเภอบางใหญ่ จังหวัดนนทบุรี 11140
 โทร: 02-9030911-2 โทรสาร: 02-9030916
 Email: mwathailand@hotmail.com

Asbestos PTFE Packing

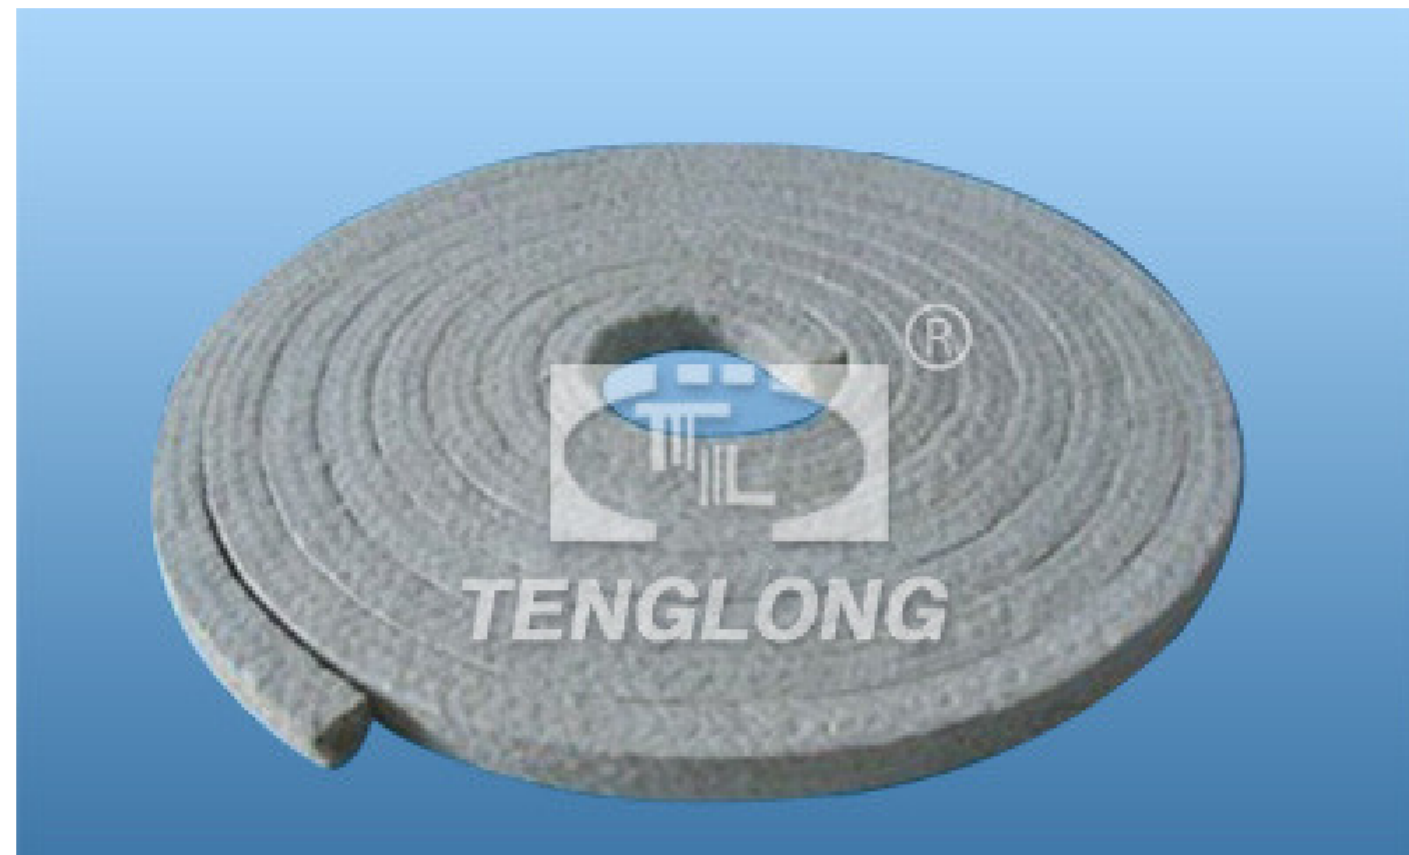

Description

Asbestos PTFE Packing is made of white and highest quality asbestos fiber packing impregnated with PTFE dispersion. In addition, asbestos packing with ***lubricants is recommended*** for use with reciprocating pumps or for the sealing in places where ***linear velocity is up to 10 m/s.***




Application:

Asbestos PTFE packing is soft in texture and it is a general service packing for all rotating and reciprocating pump, mixers and valves sealing that contain hot and cold water, ammonia, caustics, mild acids, difficult chemicals, air, gases, steam

STOCK DIMENSION:

mm sq.	4	5	6	8	10	11	12	14	16	18	20	22	25
m/kg abt.	26	14	12	9.5	5.8	4.5	4.2	3.3	2.6	2.0	1.8	1.4	1.1
Inch Sq.	5/32"	3/16"	1/4"	5/16"	3/8"	7/16"	1/2"	9/16"	5/8"	11/16"	3/4"	7/8"	1"

APPLICATION DATA:

			
T C	Pu - +260C		
P bar	20	100	100
V m/s	10	8	8
PH	2 - 12		