



M.W.A. WELDING (THAILAND) CO., LTD.

68/88 หมู่ 6 ตำบลเสาธงหิน อำเภอบางใหญ่ จังหวัดนนทบุรี
11140 โทร: 02-9030911-2 โทรสาร: 02-9030916
Email: mwathailand@hotmail.com

ซันพาส®

COTTON PACKING





M.W.A. WELDING (THAILAND) CO., LTD.

68/88 หมู่ 6 ตำบลเสาธงหิน อำเภอบางใหญ่ จังหวัดนนทบุรี
 11140 โทร: 02-9030911-2 โทรสาร: 02-9030916
 Email: mwathailand@hotmail.com

Cotton Grease Packing (Yellow)



Description: Cotton packing with yellow grease is cotton fiber packing with Oil Pre-impregnated, twisted cotton yarns, intensively re-impregnated during braiding. Flexible and elastic, easy to handle. It's an economical packing for the limits of application stated.

Application: An economical universal packing, suitable for rotating and reciprocating pumps, valves, agitators etc with water, sea-water, alcohol, etc.

Temp.		100jæ
PH		6-8
V		10m/s
Pressure	Rotating	10bar
	Reciprocating	20bar
	Valve	60bar
Density (g/cm ³)		1.2



M.W.A. WELDING (THAILAND) CO., LTD.

68/88 หมู่ 6 ตำบลเสาธงหิน อำเภอบางใหญ่ จังหวัดนนทบุรี
 11140 โทร: 02-9030911-2 โทรสาร: 02-9030916
 Email: mwathailand@hotmail.com

Cotton Grease Packing (White)



Description: Cotton Grease packing is with high quality cotton thread and made into square or lattice braids and treated with white chemically stable grease.

Application: An economical universal packing, suitable for rotating and reciprocating pumps, valves, agitators etc with water, sea-water, alcohol, etc.


Temp.		100jæ
PH		6-8
V		10m/s
Pressure	Rotating	10bar
	Reciprocating	20bar
	Valve	60bar
Density (g/cm ³)		1.2



M.W.A. WELDING (THAILAND) CO., LTD.

68/88 หมู่ 6 ตำบลเสาธงหิน อำเภอบางใหญ่ จังหวัดนนทบุรี
11140 โทร: 02-9030911-2 โทรสาร: 02-9030916
Email: mwathailand@hotmail.com

Cotton Packing with Graphite & Oil

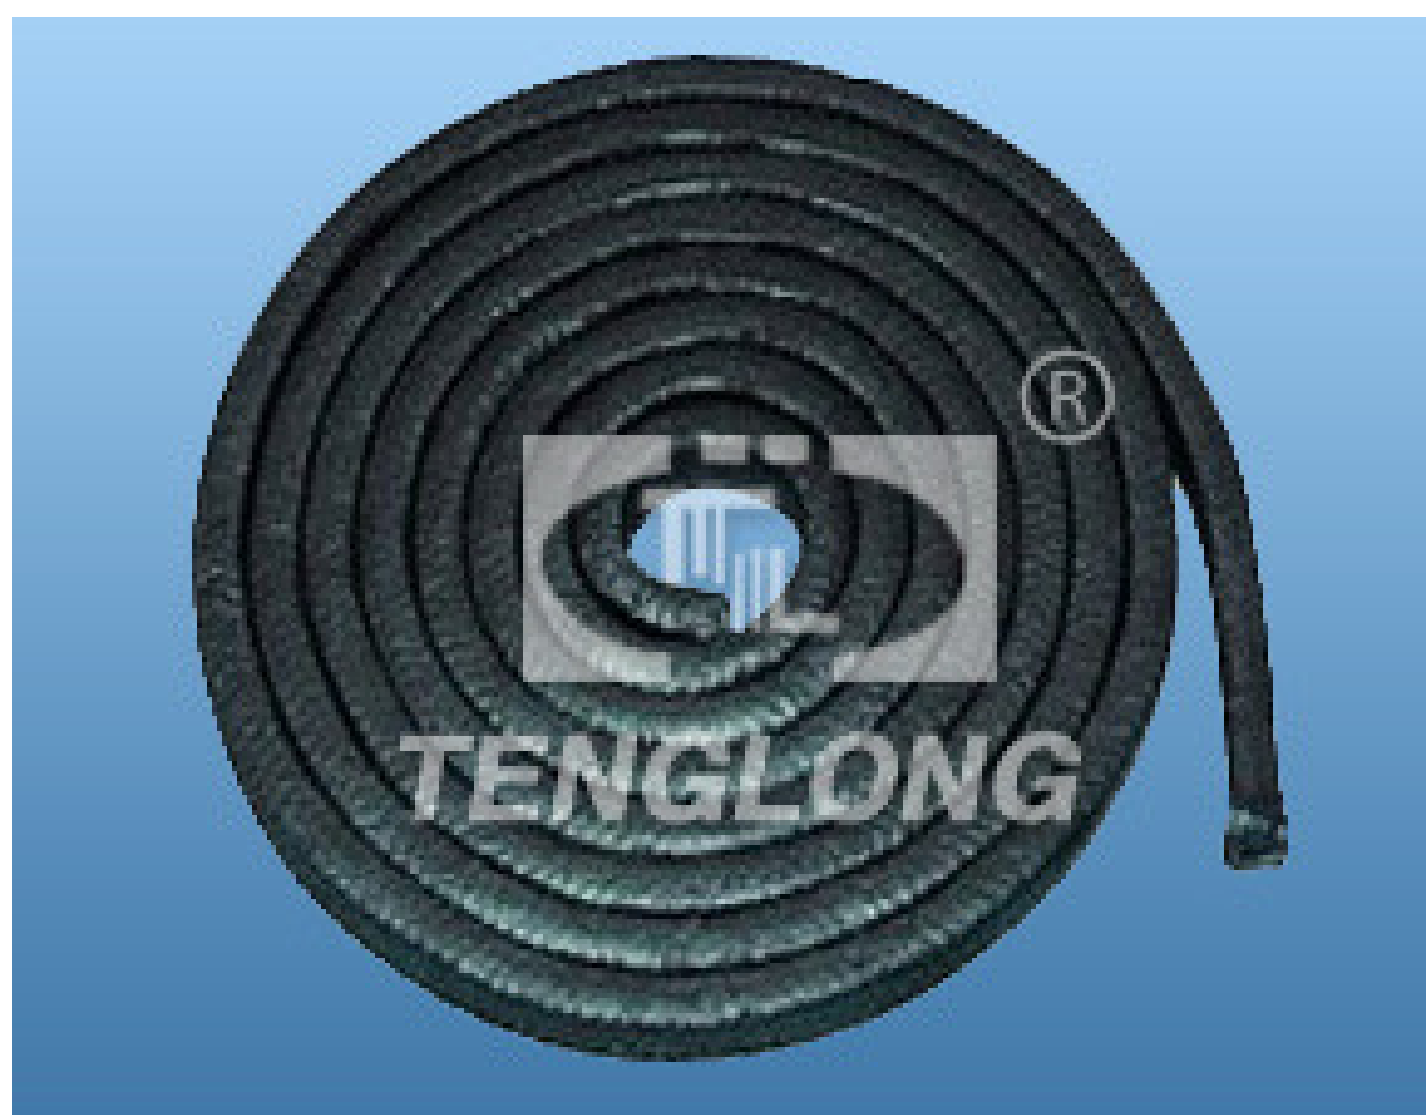

Description: Cotton Fiber Packing with Graphite is braided from cotton yarns which impregnated with special oil with graphite. Graphite reduce the frictional factor, increase the temperature. The packing is resilient and flexible

Application: Universal packing, for Rotary, reciprocating pumps, in ship building and domestic fresh water pumps. Style SIN210P is designed for hydraulic applications in low and medium pressure pumps and valves, and where contamination is not permitted.


Material	Cotton Fiber and Graphite
Temperature Range	-50 up to +130 oC atmosphere
Rotating	10bar
Reciprocating	20bar
Static	70bar
Shaft Speed	10m/s in rotary
PH	6~8
Density	1.25g/cm ³



M.W.A. WELDING (THAILAND) CO., LTD.

68/88 หมู่ 6 ตำบลเสาธงหิน อำเภอบางใหญ่ จังหวัดนนทบุรี
 11140 โทร: 02-9030911-2 โทรสาร: 02-9030916
 Email: mwathailand@hotmail.com

Cotton PTFE Packing

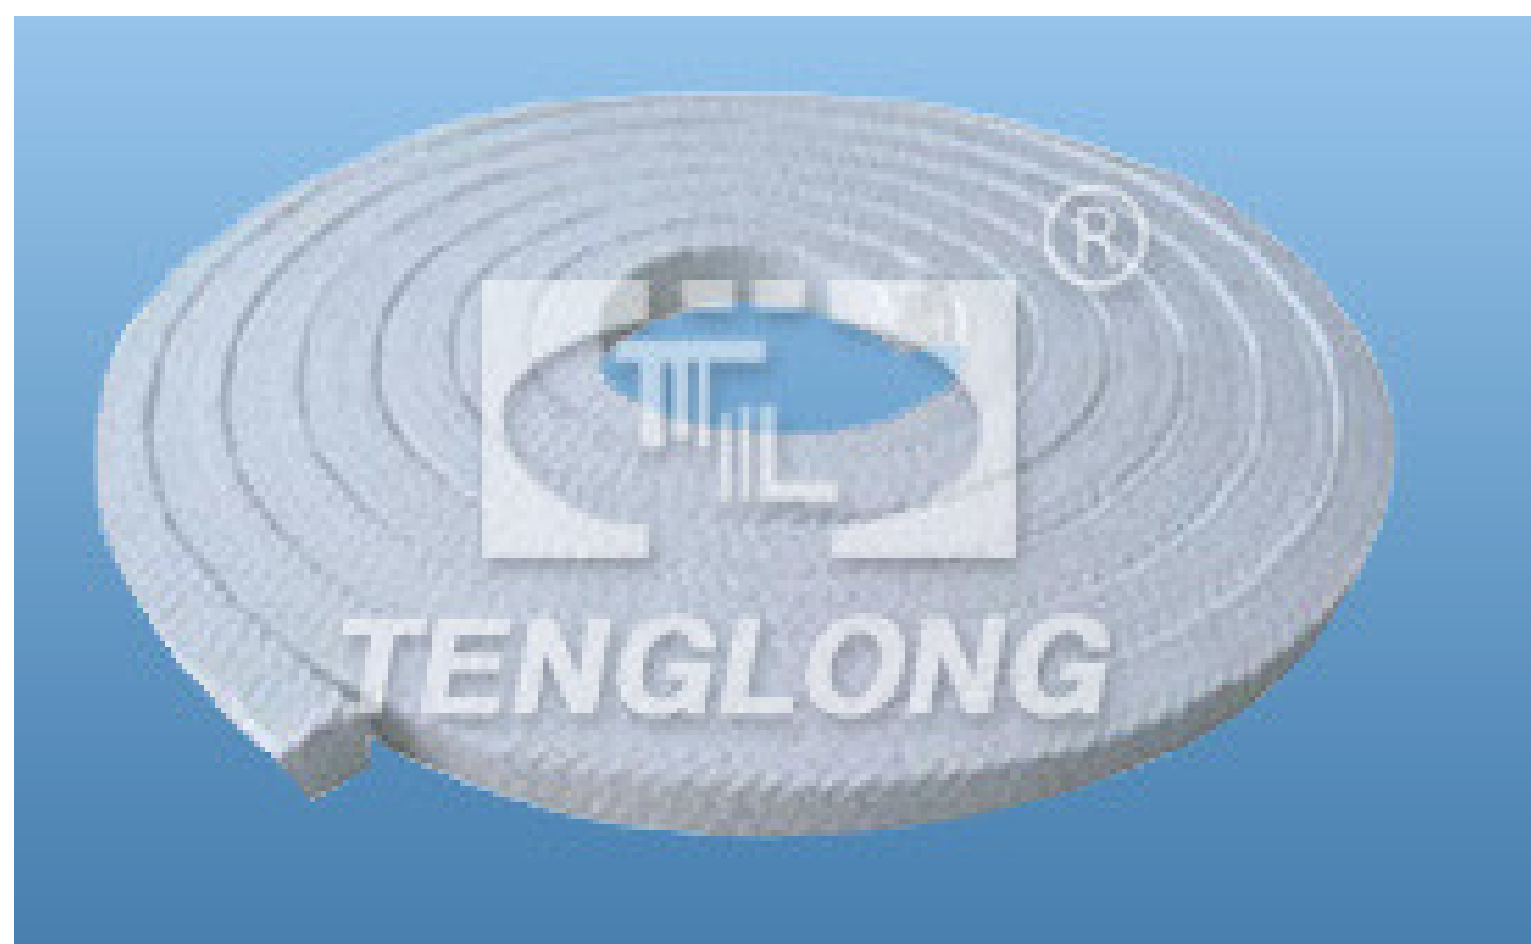




Description: Cotton Packings with PTFE Impregnation Made of long cotton fiber yarn impregnated with PTFE and additives. The packings has a low coefficient of friction & is resilient and flexible. (PH:4-10)

Application: Universal packings, for Rotary, reciprocating pumps, in ship building and domestic fresh water pumps

STOCK DIMENSION:

mm sq.	3.2	4	5	6	8	10	11	12	14	16	18	20	22	25
m/kg abt.	75	50	33.3	23	13	8.3	7.0	5.6	4.3	3.4	2.6	2.2	1.8	1.4
Inch Sq.	1/8"	5/32"	3/16"	1/4"	5/16"	3/8"	7/16"	1/2"	9/16"	5/8"	11/16"	3/4"	7/8"	1"

APPLICATION DATA:

			
T C	130C		
P bar	70	20	10
V m/s	10		
PH	6-8		