



M.W.A. WELDING (THAILAND) CO., LTD.


68/88 Moo6 Saothonghin Bangyai Nonthaburi 11140, Thailand

Tel: +662-9030911-2 Fax: +662-9030916

Email: mwathailand@hotmail.com



NYLON COUPLING

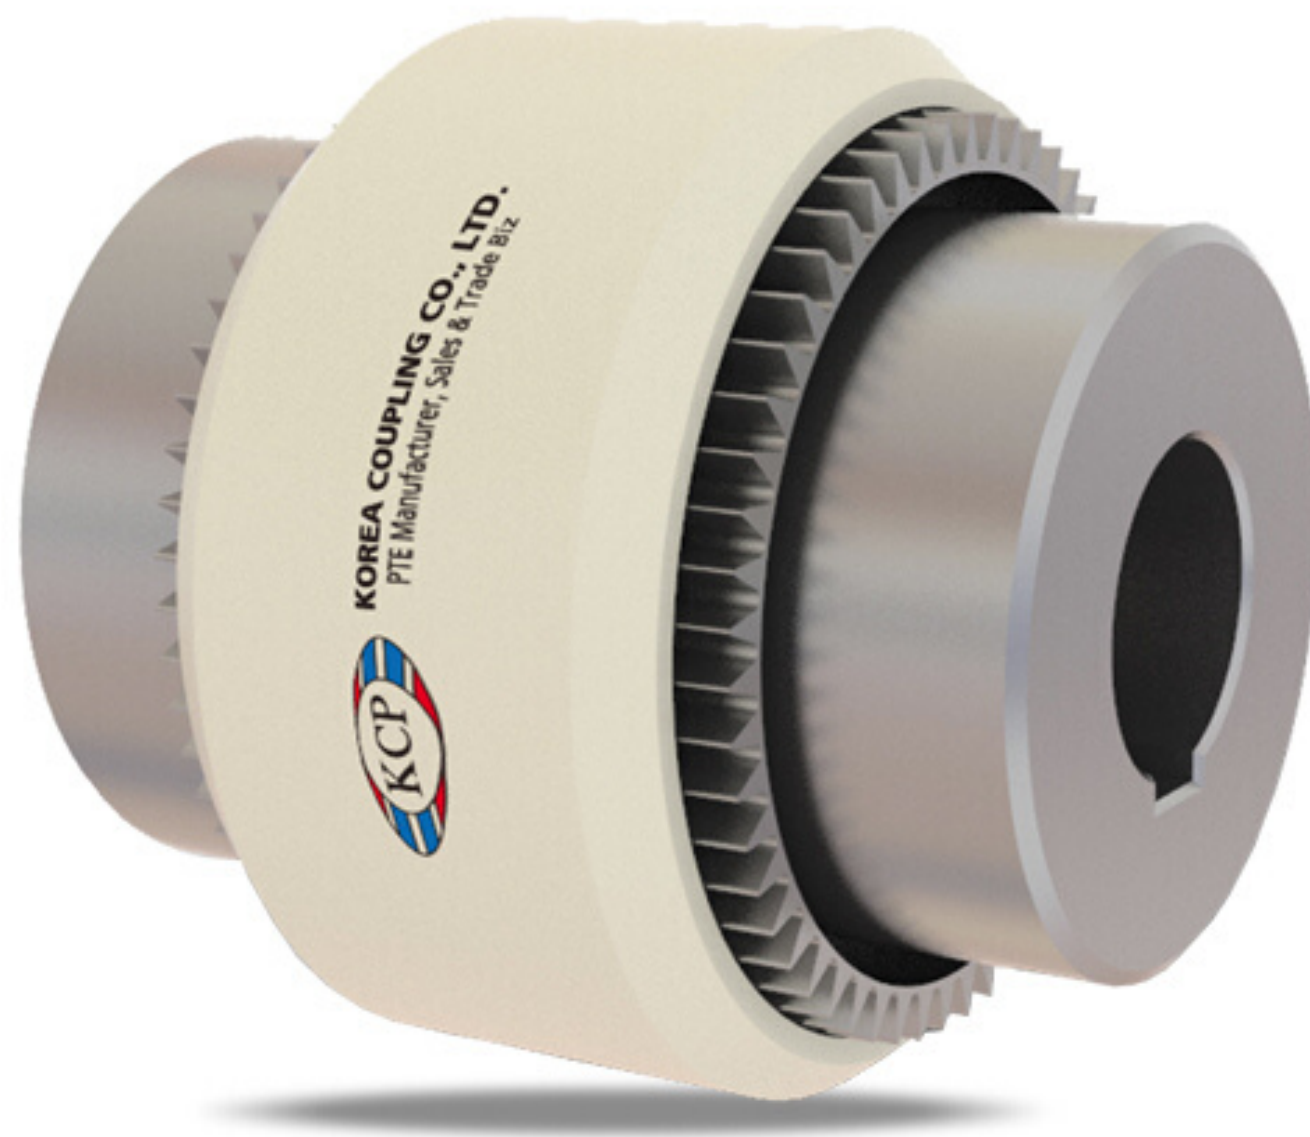

- Torsionally rigid and flexible shaft connections transmit torque
- Specifically suitable to compensate for shaft misalignment
- Available to be assembled both vertically and horizontally
- Non-lubricated and low noise
- Maintenance free, continuous operation and low friction
- High edge pressure can develop on the contact surfaces



M.W.A. WELDING (THAILAND) CO., LTD.

68/88 Moo6 Saothonghin Bangyai Nonthaburi 11140, Thailand



Tel: +662-9030911-2 Fax: +662-9030916

Email: mwathailand@hotmail.com

Type KM

NYLON COUPLING

Dimensions-Millimeters

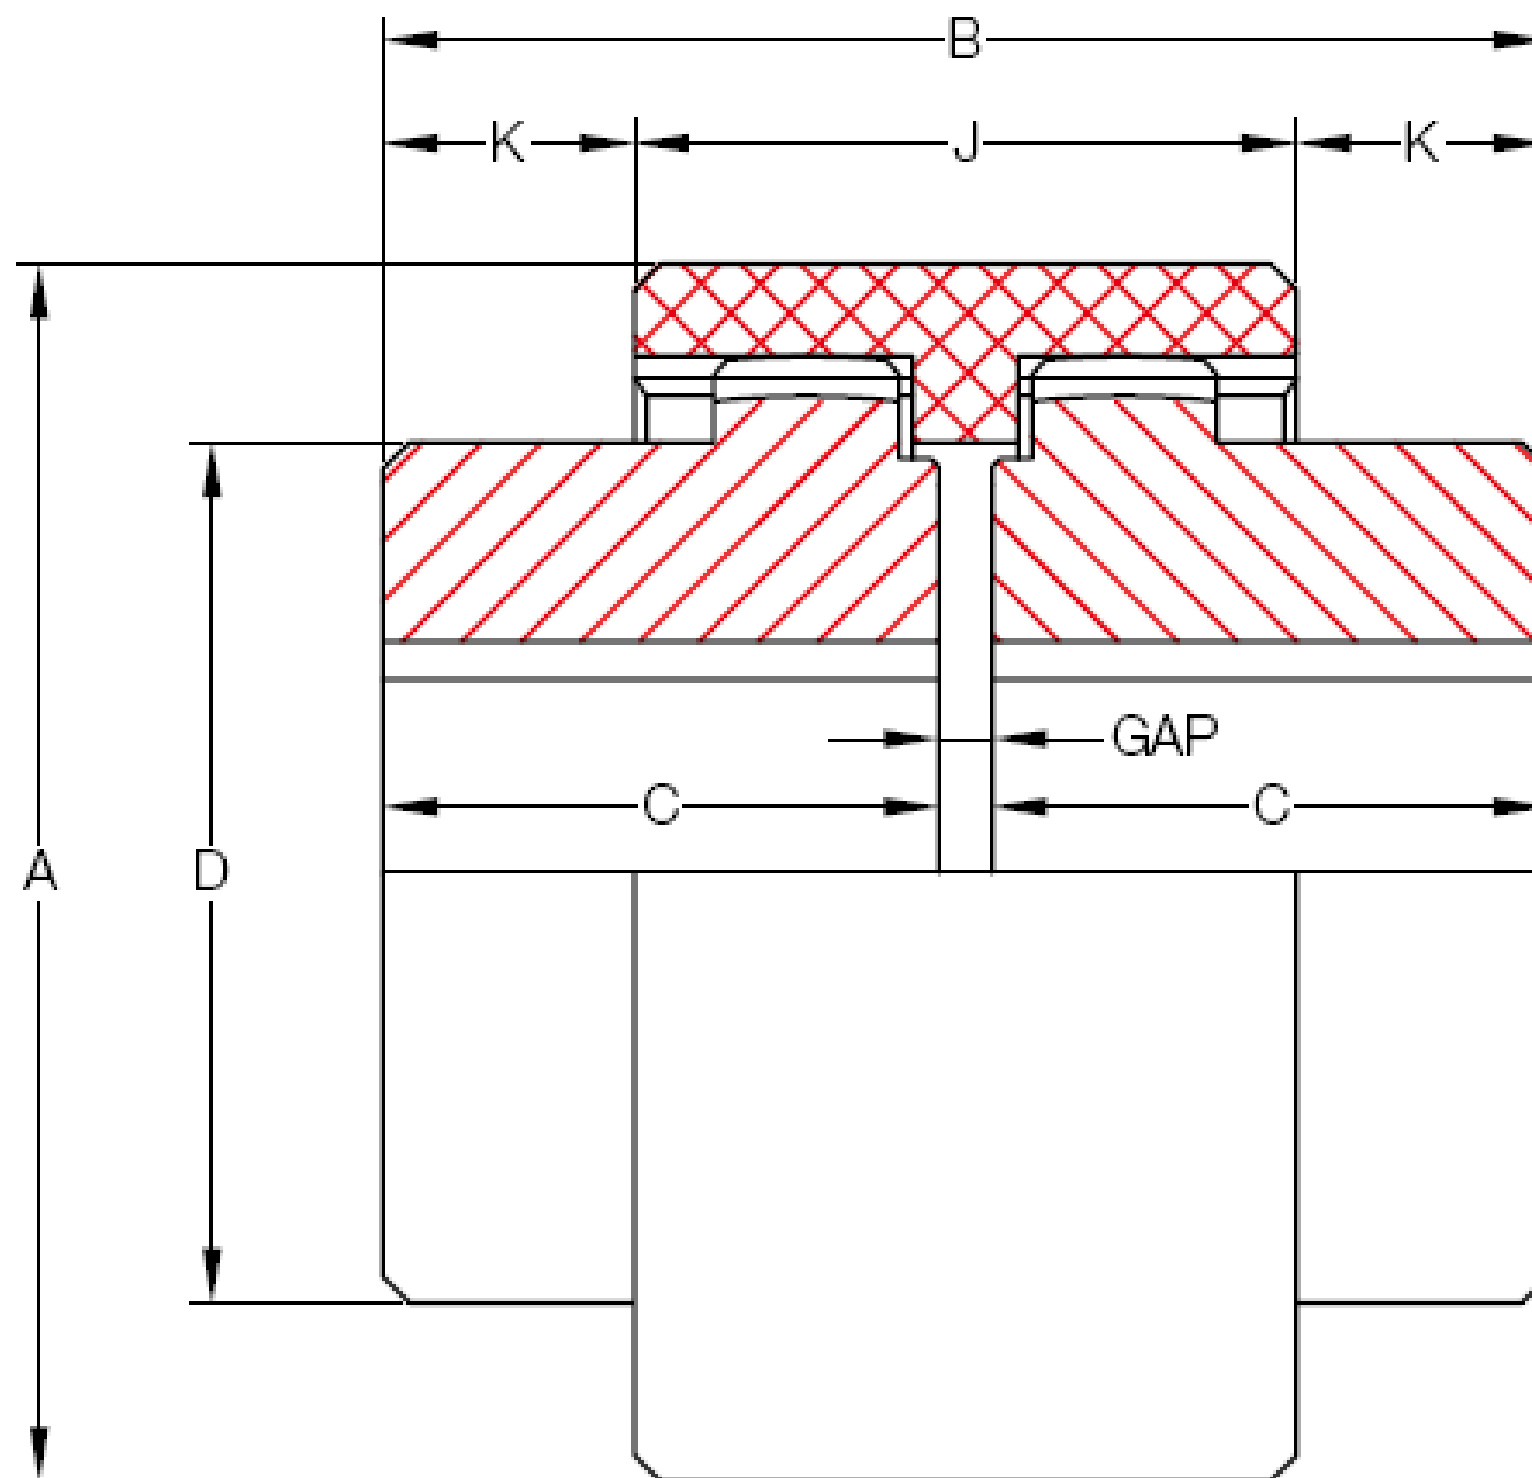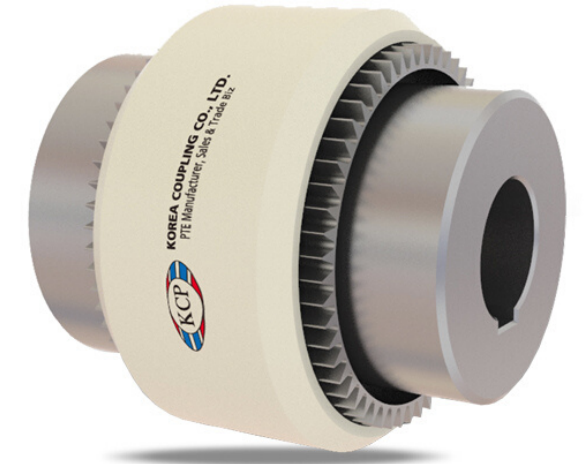

Size	Torque Rating (Nm)	Allow Speed RPM	Max Bore (mm)	Min Bore (mm)	Dimensions (Millimeters)						
					A	B	C	D	J	K	GAP
14	17	14,000	14	6	40	50	23	25	37	6.5	4
19	30	11,800	19	8	48	54	25	32	37	8.5	4
24	37	10,600	24	10	52	56	26	36	41	7.5	4
28	69	8,500	28	10	66	84	40	45	46	19.0	4
32	90	7,500	32	12	76	84	40	50	48	18.0	4
38	127	6,700	38	14	83	84	40	58	48	18.0	4
42	164	6,000	42	20	92	88	42	65	50	19.0	4
48	202	5,600	48	20	100	104	50	68	50	27.0	4
65	436	4,000	65	25	140	144	70	96	72	36.0	4
80	692	3,150	80	30	175	186	90	124	93	46.5	6
100	1,246	3,000	100	40	210	228	110	152	102	63.0	8
125	2,749	2,120	125	50	270	290	140	192	134	78.0	10

* Coupling Weight is without Bore Machining